

产品型号: SS-16-II (2D SCAN)



SS-16-II二维扫描振镜是在**SS-16**产品的基础上进行升级的一款产品。

The model SS-16-II is the advanced product based on SS-16.

更低的振镜功耗，更低的振镜温度漂移，更高的定位速度。

Much lower power loss, lower drift and higher position speed.

SS-16-II二维扫描振镜主要应用于YAG精细打标，QCW焊接，光纤焊接，CO2打标和切割等。

SS-16-II is mainly used for YAG precision marking, QCW welding, fiber welding, CO2 marking and cutting.

应用领域

- 激光雕刻
- 激光焊接
- 激光切割

Typical Applications

- Laser marking
- Laser welding
- Laser cutting

技术参数 (Specifications)

SS-16-II

入射光斑 (Aperture)	16mm
跟随误差时间 (Tracking error)	235 μ s
打标速度 (Marking speed)	1.5 m/s
定位速度 (Positioning speed)	7.0 m/s
重复定位精度 (Repeatability)	<20 μ rad
运行8小时以上漂移 (8hours drift)	<0.4 mrad
非线性 (Nonlinearity)	<5mrad
光学扫描角度 (Scan angle)	$\pm$ 0.35 rad
供电需求 (Power requirements)	$\pm$ 15V DC 3A
接口 (Interface)	数字 (Digital) XY2-100 * 模拟 (Analog) $\pm$ 5V
工作温度 (Operating temperature)	25°C $\pm$ 10°C

(All angles are in optical degrees) F-theta f=160mm

规格型号

描述


10600nm

SS-16-10600-DA-II	反射波长10600nm	数字digital
SS-10-10600-A-II	反射波长10600nm	模拟analog


1064nm

SS-16-1064-DA-II	反射波长1064nm	数字digital
SS-16-1064-A-II	反射波长1064nm	模拟analog


机械尺寸 (单位mm) (Dimensions)

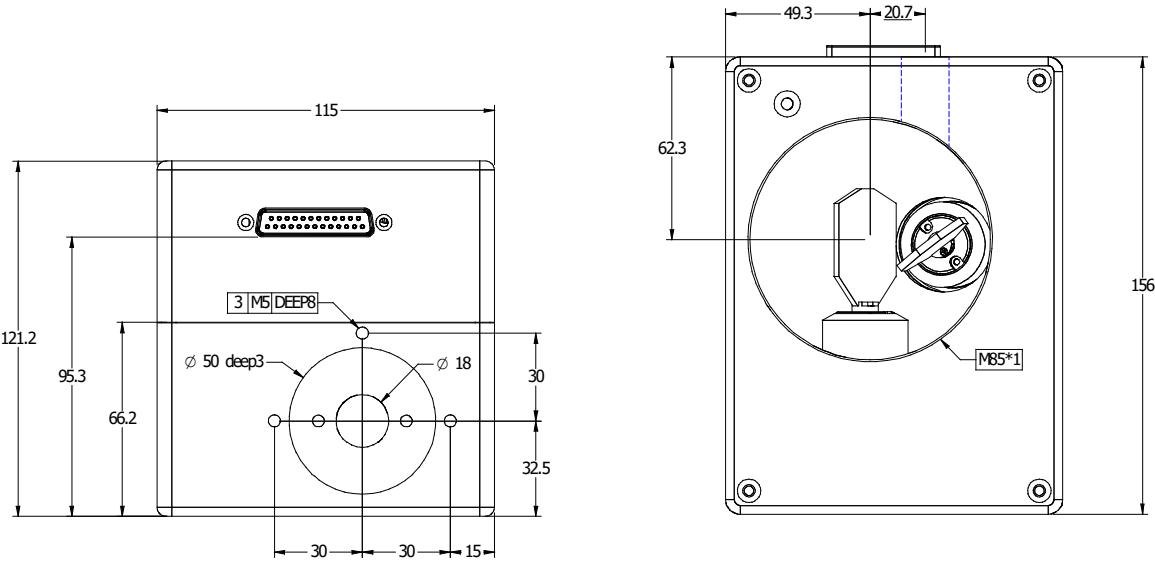

接口定义 (Interface)

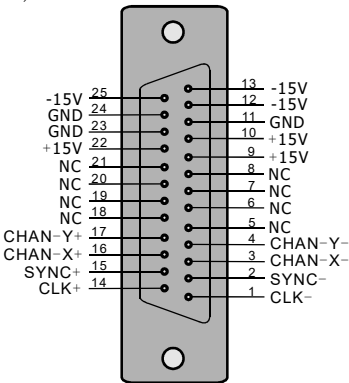

25-pin female D-SUB connector
(DIGITAL)

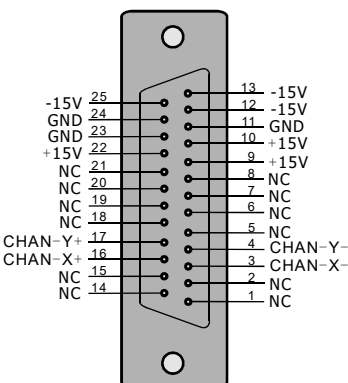

25-pin female D-SUB connector
(ANALOG)