


产品型号：SPS30

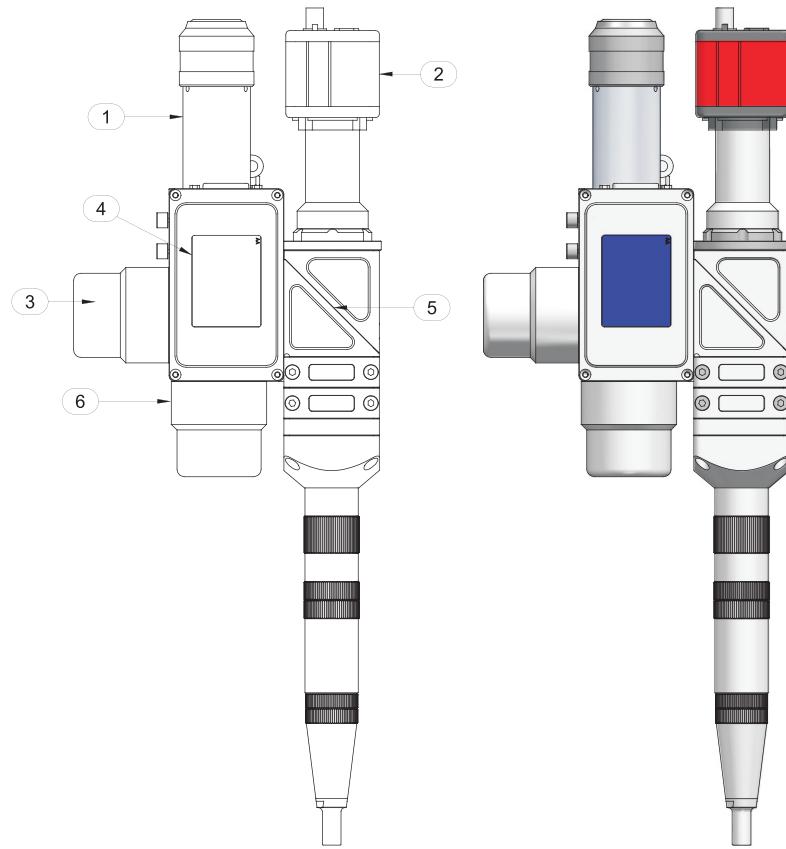

技术参数 (Specifications)


准直镜片	F75/F100
聚焦镜片	F200/F250/F300
摆动频率(Frequency)	≤300HZ
摆动幅度(Range)	0-5 mm
摆动角度(Angle)	0° / 90° / 180° / 270°
摆动模式(Mode)	- I O 8 @ ◎
非线性(Nonlinearity)	<5mrad
供电需求(Power requirements)	±15V DC 3A
工作温度(Operating temperature)	25°C ± 10°C
功率(Laser Power)	2KW
镜片材料(Mirror Substrate)	石英(Quartz)
水冷(Water cooling)	准直水冷
吹气装置(Blowing device)	同轴吹气/旁轴吹气
控制方式(Control mode)	光耦隔离启动(15-24V) 可并联在激光器出光信号做为摆动信号 触摸屏调整控制参数
重量(weight)	2.65 Kg

(All angles are in optical degrees)


F-theta f=160mm

序号	名称
1	QBH组件
2	CCD组件
3	X电机组件
4	显示屏控制面板
5	反射镜组件
6	Y轴电机组件

控制面板 (Control pane)

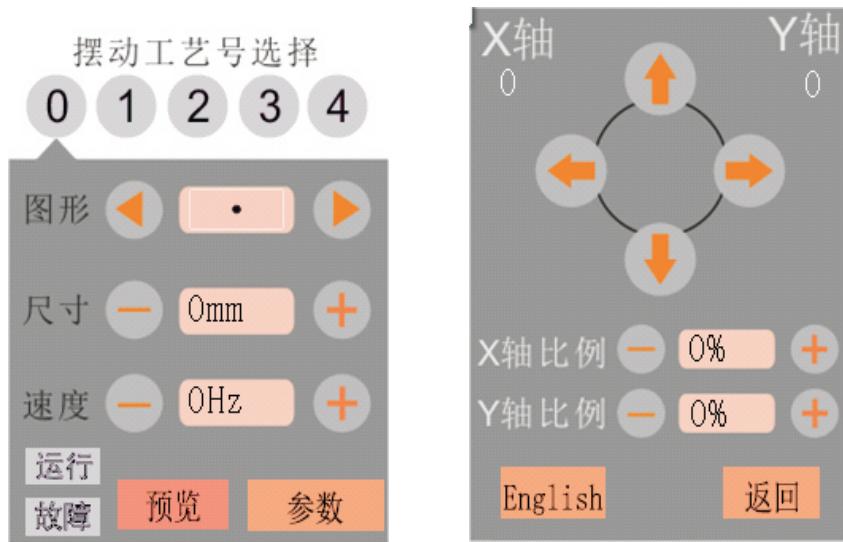

机械尺寸 (单位mm) (Dimensions)

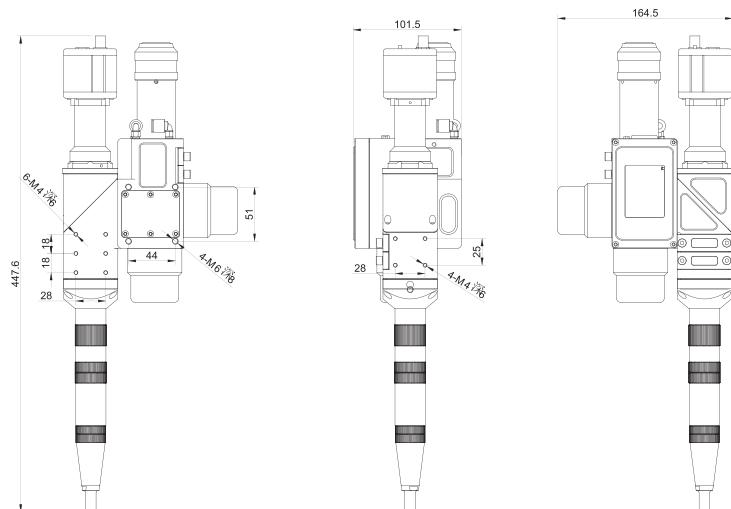

接口定义 (Interface)

